




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b> <b>H03B 11/04, H01J 49/42</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/38312</b> <b>(43) International Publication Date:</b> 29 June 2000 (29.06.00)
<b>(21) International Application Number:</b> PCT/GB98/03856 <b>(22) International Filing Date:</b> 21 December 1998 (21.12.98) <b>(71) Applicant (for all designated States except US):</b> SHIMADZU RESEARCH LABORATORY (EUROPE) LTD [GB/GB]; Wharfside, Trafford Wharf Road, Manchester M17 1GP (GB). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> KAWATO, Eizo [JP/GB]; 2 Warren Avenue, Cheadle, Cheshire SK8 1ND (GB). DING, Li [CN/GB]; Flat 3, 20 Moxley Road, Crumpsall, Manchester M8 4HJ (GB). <b>(74) Agent:</b> MATHISEN, MACARA & CO; The Coach House, 6-8 Swakeleys Road, Ickenham, Uxbridge UB10 8BZ (GB).		<b>(81) Designated States:</b> AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>

**(54) Title:** METHOD OF FAST START AND/OR FAST TERMINATION OF A RADIO FREQUENCY RESONATOR

**(57) Abstract**

A method of fast start and/or fast termination of a radio frequency resonator, which has a coil (2), a capacitor (1) and two switches with internal resistance (4, 5). One end of the switches is connected to a junction of the coil (2) and the capacitor (1) where a RF voltage is provided, and another end of each switch is connected to high voltage power supplies with opposite polarities (6, 7). The method comprises: closing one of the switches for a short period of time for fast start of the RF resonator, and/or closing both switches for a while for fast termination of the RF resonator.

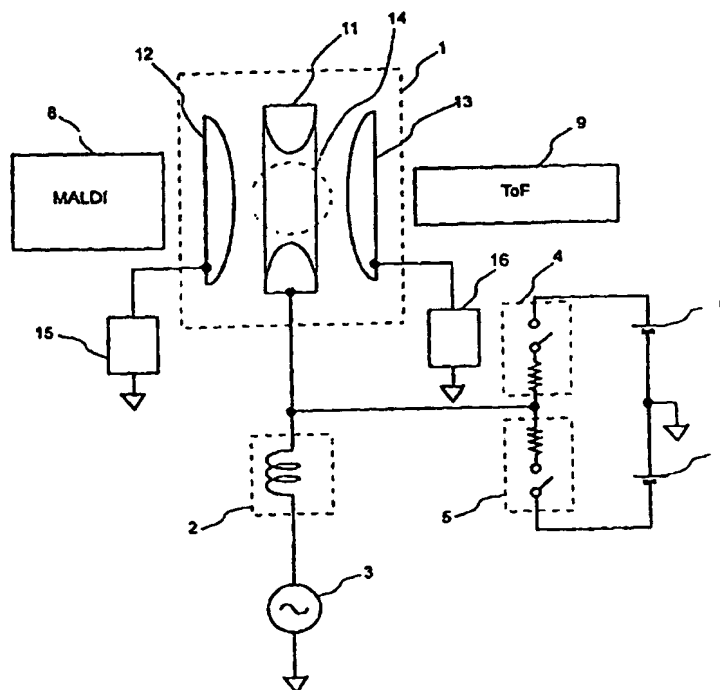

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

## **METHOD OF FAST START AND/OR FAST TERMINATION OF A RADIO FREQUENCY RESONATOR**

### **FIELD OF THE INVENTION**

The present invention relates to a radio frequency (RF) resonator and an apparatus using a RF resonator circuit. More specifically, the invention relates to an ion-trapping device namely a quadrupole ion trap.

### **BACKGROUND OF THE INVENTION**

The quadrupole ion trap is initially described by Paul et al in U.S. Patent 2,939,952 and normally consists of three electrodes; a ring electrode and two end-cap electrodes one on each side of the ring electrode. A radio frequency (RF) voltage is normally applied to the ring electrode, and two end-cap electrodes are normally grounded. A coil is connected to the ring electrode forming a LC resonator together with the capacitance between the ring electrode and the two end-cap electrodes as well as the capacitance of all other circuit elements connected to the ring electrode. Because of the high Q-value of the resonator, even a low voltage RF driver, which is connected to the coil directly or through transformer coupling, can effectively produce a high RF voltage on the ring electrode.

A quadrupole ion trap can be used as an ion-trapping device of mass analysis apparatus together with a variety of ion sources. One of the most popular ion sources is liquid chromatography with electrospray ionization. Another ion source, which seems a very promising combination with the ion trap, is matrix-assisted laser desorption/ionization (MALDI).

The ions produced by a MALDI ion source are inevitably pulsed and synchronized to

the laser pulse. A trapping efficiency of those ions is maximized by using a method of fast start of RF voltage as described in UK Patent Application No.9802112.4. Unfortunately, an ordinary RF driver circuit provides only a low excitation voltage, and the rate of increase of RF voltage becomes quite low. The time to establish a required RF voltage usually requires several cycles of RF or more than that.

Another attempt was made using a quadrupole ion trap in conjunction with a time-of-flight mass spectrometer, which is described in the UK Patent Application No.9802111.6. In this method ion extraction voltages are applied to the two end-cap electrodes, and the RF voltage on the ring electrode should be terminated at the same time or nearly the same time of application of the extraction voltages. To prevent the ions escaping from the ion-trapping region, the termination should be fast enough, at least less than one cycle of the RF. Again, this is difficult to achieve using an ordinary RF driver circuit. While the excitation voltage of the RF driver circuit is terminated, the energy stored in the resonator is consumed and is released only via the resistance of the resonator, and the time constant of decay of the RF voltage is usually much more than one cycle of the RF.

It is an object of the invention to provide a method of fast start of the RF resonator and/or fast termination of the resonator to achieve a high efficiency of ion trapping from the MALDI ion source and/or effective extraction of the ions into a time-of-flight mass spectrometer.

### SUMMARY OF THE INVENTION

Accordingly, the invention provides a method of fast start and/or fast termination of a radio frequency resonator, which has a coil, a capacitor means and two switch means each having an internal resistance, one end of each said switch means being connected

to a junction of said coil and said capacitor means where a radio frequency voltage is provided, and another end of each said switch means being connected to high voltage power supplies having opposite polarities, the method comprising: closing one of said switch means for a short period of time for fast start of said radio frequency resonator, and/or closing both of said switch means for a time interval for fast termination of said radio frequency resonator.

In the MALDI ion source, ions are produced by a laser pulse directed at the sample surface, and are guided into an ion trap using ion optics built inside the MALDI ion source. Before ions are produced, the RF voltage applied on the ring electrode is zero. When the ions are inside the ion-trapping region surrounded by three electrodes, one of the switches is closed to charge the capacitance between the ring electrode and the end-cap electrodes, the capacitance due to additional circuitry, for example a measuring circuit of the RF voltage, and a stray capacitance. Once the capacitance is charged, the switch is opened immediately to initiate a free oscillation of the resonator. The excitation voltage of the RF driver circuit is also set to a proper voltage to sustain the oscillation, but timing is not so critical because the RF voltage does not change so rapidly with a lower excitation voltage of the RF driver circuit.

For extraction of ions into a time-of-flight mass spectrometer, the RF voltage is turned to zero by closing both switches at the same time. When the high voltage power supplies connected to the switches have the same voltage with opposite polarities and the switches have the same internal resistance the RF voltage applied between the two switches approaches to zero with a time constant determined by the capacitance between the electrodes and the resistance of the switches. This time constant can be set small enough to prevent the ions escaping from the ion-trapping region. The extraction voltages are also applied to the end-cap electrodes at nearly the same time as the RF termination for extracting ions into the time-of-flight mass spectrometer.

The switches are kept closed until all the ions are extracted from the ion trap. Later, the switches are opened, without affecting ion motion. The excitation voltage of the RF driver circuit is also set to zero to prevent oscillation after ion extraction, but again timing is not so critical because the RF voltage is kept zero by the switches while ions are extracted.

### BRIEF DESCRIPTION OF THE DRAWINGS

A method of fast start and/or fast termination of the resonator is now described, by way of example only, with reference to accompanying drawings in which:

Figure 1 is a schematic representation of a quadrupole ion trap with a MALDI ion source and a time-of-flight mass spectrometer.

Figure 2 is an explanatory timing diagram showing a RF voltage and states of two switches.

### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Referring to Figure 1, a quadrupole ion trap 1 comprises a ring electrode 11 and two end-cap electrodes 12 and 13. These three electrodes form an ion-trapping region 14. The end-cap electrodes 12 and 13 are connected to the voltage sources 15 and 16, respectively, which provide extraction voltages and voltage waveforms used during ion trap operations. A coil 2 is connected to the ring electrode 11 and followed by a RF driver circuit 3. To the ring electrode 11, two switches 4 and 5 are also connected. On the other end of these two switches, two high voltage supplies 6 and 7 are connected, respectively.

Figure 2 illustrates the timing of switch operations as well as the RF voltage in the case of fast start of RF voltage to a negative polarity. In this case, switch 5 connected to the negative high-voltage supply 7 is turned on, (i.e. closed) at the beginning, to set the RF voltage to be the same as the voltage of the high voltage supply 7. Soon after, the switch 5 is turned off (i.e. opened) and the RF resonator will start to oscillate at its resonance frequency. In this example, fast termination of RF resonator is made at a positive peak of a RF voltage. At this moment, both switches 4 and 5 are turned on. Positive and negative voltages of the high voltage supplies 6 and 7 are divided according to the ratio of internal resistances of the switches 4 and 5. Because the voltage of high voltage supply 6 is the same as that of high voltage supply 7 and the internal resistance of the switch 4 is the same as that of the switch 5, the RF voltage becomes zero and is kept zero while both switches are kept on. After all ions have been extracted from the quadrupole ion trap, both switches 4 and 5 are turned off.

The RF driver circuit 3 is also operated to match the voltage determined by these switching operations. At fast start of the RF resonator, the RF driver circuit 3 is set to produce a peak voltage the same as the voltage of high voltage supply 7. Thus the oscillation initiated by switch operation can be sustained continuously by the RF driver circuit 3. At fast termination of the RF resonator the RF driver circuit 3 is set to zero and the RF voltage, set to zero by the switching operations, will be kept zero until the next sequence will start.

Although the aforementioned example shows one switch for each polarity, either or both of the switches can be composed of a set of switches. For example, the switch 4 or 5 can be a single power MOSFET device or a set of power MOSFET devices connected in series.

The RF driver circuit 3 is depicted with a direct connection to the coil 2, but the RF

driver can be connected with transformer coupling to the coil 2.

In Figure 2, the RF voltage is terminated after only 1.5 cycle for explanatory purpose only. Practically, the RF voltage is sustained for a much longer time to handle ions trapped inside the trapping region. Usually, the RF voltage is changed to shift a trapping condition before extraction will be made. Thus, a termination may start from a RF voltage different from the voltage of high voltage supply 6 and/or 7.



**CLAIMS**

1. A method of fast start and/or fast termination of a radio frequency resonator, which has a coil, a capacitor means and two switch means each having an internal resistance, one end of each said switch means being connected to a junction of said coil and said capacitor means where a radio frequency voltage is provided, and another end of each said switch means being connected to high voltage power supplies having opposite polarities, the method comprising:
  - (a) closing one of said switch means for a short period of time for fast start of said radio frequency resonator, and/or
  - (b) closing both of said switch means for a time interval for fast termination of said radio frequency resonator.
2. A method as set forth in claim 1, wherein said radio frequency resonator is built in an ion-trapping device.
3. A method as set forth in claim 2, wherein said ion-trapping device is a quadrupole ion trap.
4. A method as set forth in claim 3, wherein said quadrupole ion trap is associated with a MALDI ion source and/or a time-of-flight mass spectrometer.
5. A method as set forth in any one of claims 1 to 4, wherein said switch means having an internal resistance can be either a switching device or a set of switching devices connected in series.
6. A method as set forth in claim 5, wherein said switching device is a power MOSFET with a proper gate driver circuit.

7. A method as set forth in claim 5 or claim 6, wherein said internal resistance consists of the internal resistance of said switching device and, optionally, the resistance of at least one external resistor connected to said switching device(s) in series.
8. A method as set forth in any one of claims 1 to 7, wherein said internal resistance is the same for both said switch means, and voltage provided by said high voltage power supplies is the same with opposite polarities.
9. A method as set forth in any one of claims 1 to 8, wherein said capacitor means consists of the capacitance between a ring electrode and end-cap electrodes, the capacitance due to additional circuit, for example a measuring circuit of the RF voltage, and a stray capacitance.
10. An apparatus having a radio frequency resonator, comprising a coil, a capacitor means and two switch means each having an internal resistance, one end of each said switch means being connected to a junction of said coil and said capacitor means where a radio frequency voltage is provided, and another end of each said switch means is connected to high voltage power supplies having opposite polarities, and said switch means being operated by a method comprising:
- (a) closing one of said switches for a short period of time for fast start of said radio frequency resonator, and/or
  - (b) closing both of said switches for a time interval for fast termination of said radio frequency resonator.
11. An apparatus as set forth in claim 10, wherein said apparatus is an ion-trapping device.

12. An apparatus as set forth in claim 11, wherein said ion-trapping device is a quadrupole ion trap.
13. An apparatus as set forth in claim 12, wherein said quadrupole ion trap is associated with a MALDI ion source and/or a time-of-flight mass spectrometer.
14. An apparatus as set forth in any one of claims 10 to 13, wherein said switch means having an internal resistance can be either a switching device or a set of switching devices connected in series.
15. An apparatus as set forth in claim 14, wherein said switching device is a power MOSFET with a proper gate driver circuit.
16. An apparatus as set forth in claim 14 or claim 15, wherein said internal resistance consists of the internal resistance of said switching device and, optionally, the resistance of at least one external resistor connected to said switching device(s) in series.
17. An apparatus as set forth in any one of claims 10 to 16, wherein said internal resistance is the same for both said switch means and voltage provided by said high voltage power supplies is the same with opposite polarities.
18. An apparatus as set forth in any one of claims 10 to 17, wherein said capacitor means consists of the capacitance between a ring electrode and end-cap electrodes, the capacitance due to additional circuitry, for example a measuring circuit of the RF voltage, and a stray capacitance.
19. An apparatus including a radio frequency resonator, comprising capacitor

means, a coil coupled to the capacitor means and first and second switch means each having an internal resistance, wherein a radio frequency voltage is applied to a junction of the coil and the capacitor means, one end of each said switch means is connected to the junction, another end of each said switch means is coupled to a source of high voltage for supplying to the first and second switch means respective high voltages of opposite polarity, one or another of said switch means being operable for fast start of said radio frequency resonator and/or both of said switch means being simultaneously operable for fast termination of said radio frequency resonator.

1/2

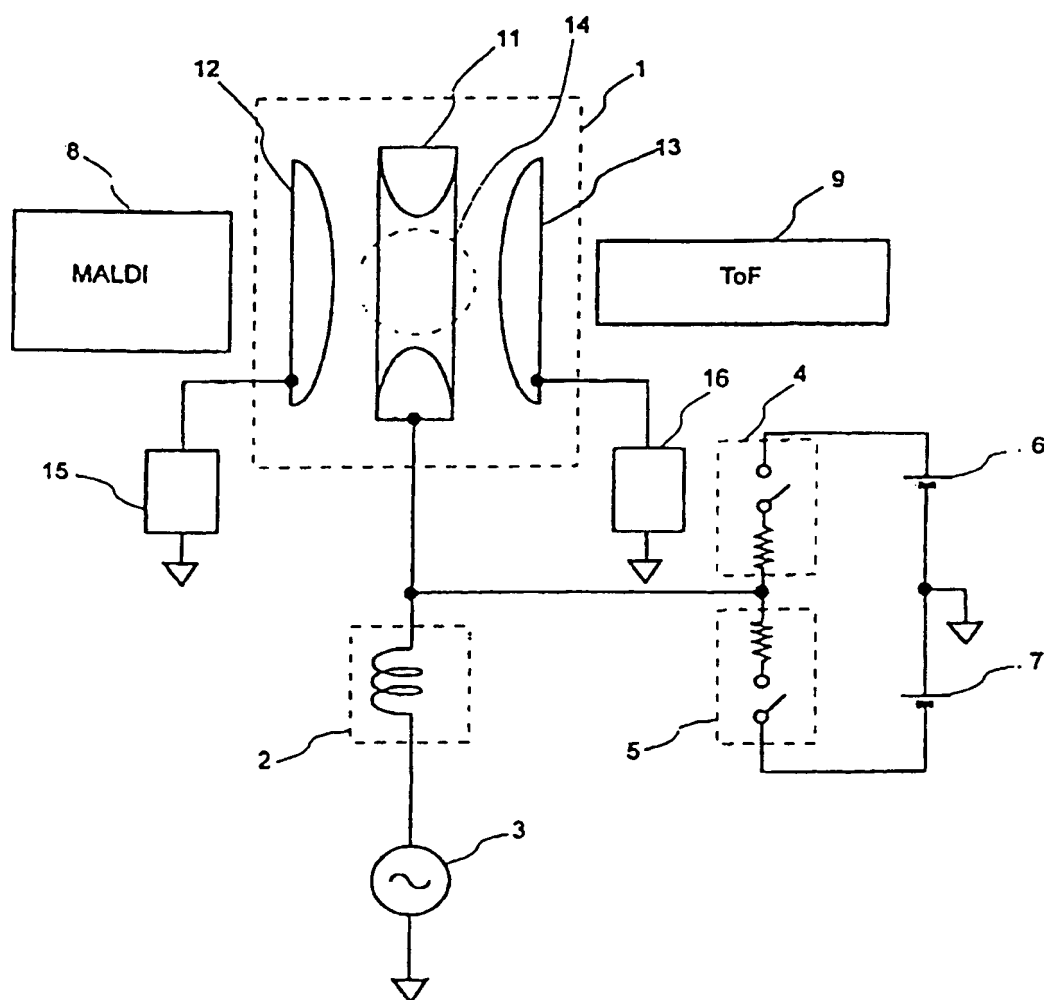


FIG.1

2/2

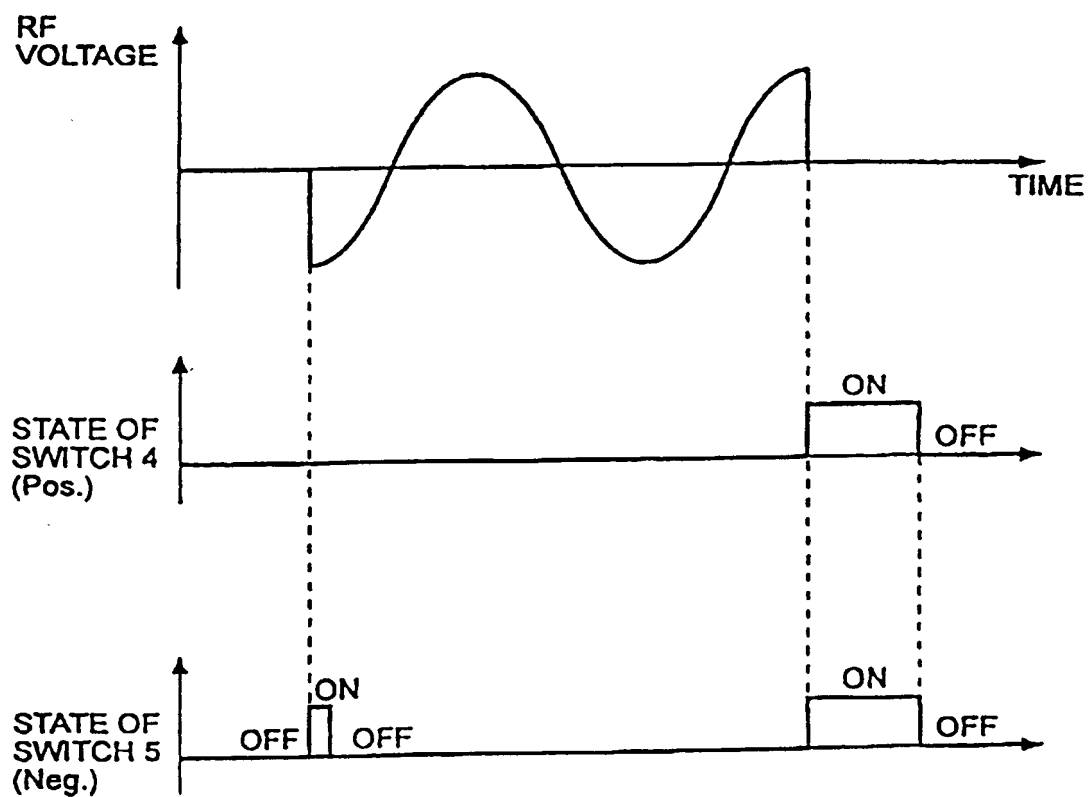


FIG. 2

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 98/03856

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H03B11/04 H01J49/42

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H03B H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 866 145 A (HESS JR WILLIAM EMIL ET AL) 11 February 1975 (1975-02-11) figure 1 column 3, line 13 - column 5, line 23 ----	1, 10, 19
A	US 5 517 158 A (GABARA THADDEUS J) 14 May 1996 (1996-05-14) column 3, line 1 - column 6, line 63; figures 1, 2 ----	1, 10, 19
A	US 4 833 427 A (LEUTHOLD OSKAR N ET AL) 23 May 1989 (1989-05-23) column 2, line 10-25; figures 1, 2, 4, 5 ----	1, 10, 19
A	US 5 399 857 A (DOROSHENKO VLADIMIR M ET AL) 21 March 1995 (1995-03-21) column 5, line 31-40; figure 8B column 6, line 7-17 -----	1, 10, 19

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance  
"E" earlier document but published on or after the international filing date  
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  
"O" document referring to an oral disclosure, use, exhibition or other means  
"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.  
"&" document member of the same patent family

Date of the actual completion of the international search

2 August 1999

Date of mailing of the international search report

13/08/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Centmayer, F

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 98/03856

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3866145	A	11-02-1975	NONE	
US 5517158	A	14-05-1996	DE 19545790 A JP 8222948 A	20-06-1996 30-08-1996
US 4833427	A	23-05-1989	EP 0333804 A JP 2501523 T WO 8903617 A	27-09-1989 24-05-1990 20-04-1989
US 5399857	A	21-03-1995	NONE	